

Key Advantages

- Saves floor space
- Smoother and superior ride comfort
- PLC based operation
- Traction and Hydraulic options available
- 2.5 & 3 ton capacities available



BUILDING REQUIREMENTS

SPEED (M/MIN)	OVERHEAD (OH)	PIT DEPTH (PD)	M/C ROOM HEIGHT (MH)
20, 30	3600	1200	2000

STANDARD DIMENSIONS & REACTIONS

TYPE	MODEL	SPEED (M/MIN)	CLEAR OPENING OP	CAR		HOISTWAY X x Y	M/C ROOM MX x MY	MACHINE ROOM	
				INTERNAL CA x CB	EXTERNAL A x B			R1	R2
STANDARD TYPE	RRI-CLH2000-2U	20, 30, 45	2350	2350 x 5300	2450 x 5300	3300 x 5700	2500 x 2800	5500	250
	RRI-CLH2500-2U	20, 30, 45	2750	2750 x 6300	2850 x 6300	3600 x 6700	2500 x 2800	6400	300
DOUBLE ENTRANCE TYPE	RRI-CLH2000-2UD	20, 30, 45	2350	2350 x 5300	2450 x 5300	3300 x 6000	2500 x 2800	5500	250
	RRI-CLH2500-2UD	20, 30, 45	2750	2750 x 6300	2850 x 6300	3600 x 7000	2500 x 2800	6400	300

• Available in 2 ton & 2.5 tons capacity

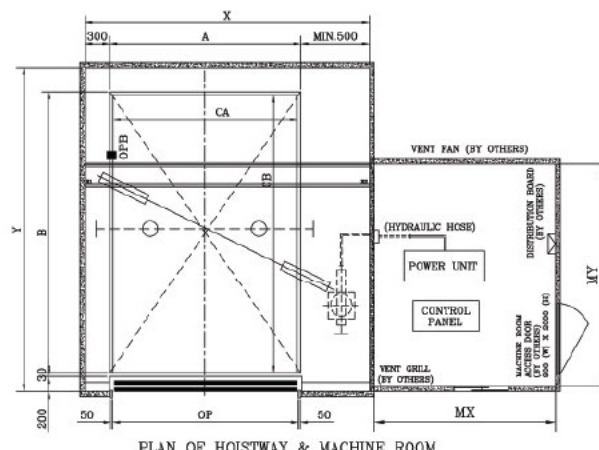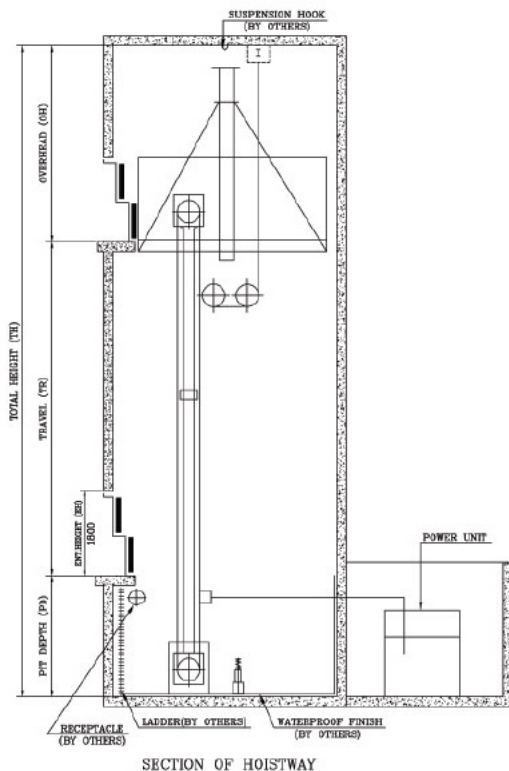

NOTES:

1. The car external sizes can be varied in line with entrance type.
2. The above are minimum sizes.
3. All dimensions are in mm.